


PRODUCT INFORMATION SHEET

Pneumatic impact wrench

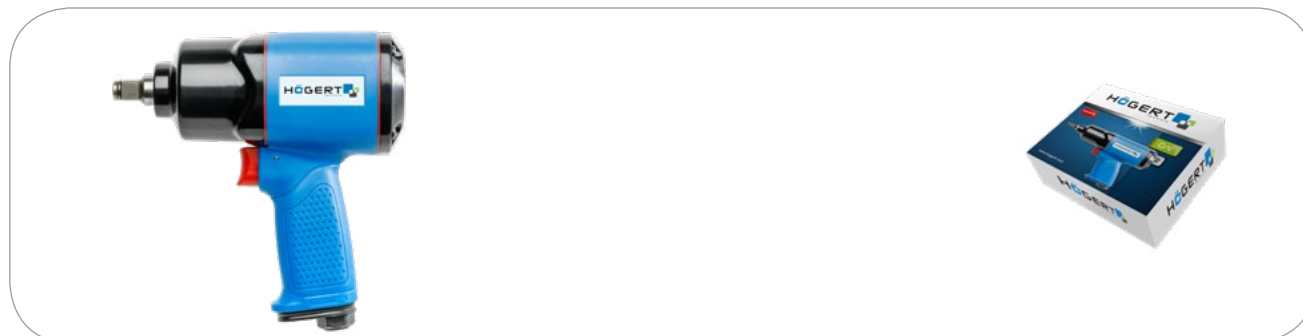

Product description

A tool designed for a variety of applications in car-service workshops, tyre-service workshops, and in machine-shops for assembly purposes.

Characteristics

- sturdy aluminium composite enclosure;
- lightweight and well-balanced centre of gravity;
- 3-step adjustment of rotations;
- clockwise/anticlockwise rotation toggle switch;
- air outlet located in the bottom part of the handle;
- powerful TWIN HAMMER-type impact mechanism;
- 1/2" spindle;
- power range up to 610 Nm;
- 1/4" air connection;
- working pressure: 6.3 bar;
- air consumption: 198 l/min;
- rotational speed: 7,000 RPM;
- weight: 2 kg.

Technical data

HT4R622	5902801026621	1 pc.	10 pcs.

1/2" 610 Nm

Distributor:

RU 000 «ГТВ РУС»
140073 Московская область
Люберецкий район, пос.Томилино
мкрн. Птицефабрика, Литер 7А

CZ GTV Czech Distribution s.r.o.
CTPark Ostrava, Na Rovince 879
720 00 Ostrava Hrabová

HR GTV Croatia d.o.o.
Kovinska 4a, 10000 Zagreb, Hrvatska

Högert Technik GmbH
Pariser Platz 6a
10117 Berlin, Deutschland
Importer: GTV, Przejazdowa 21
05-800 Pruszków, Polska